


Hochleistungs- Heizpatronen Typenliste Typ HS/VDE



HEINZ STEGMEIER
GmbH
Annastraße 27
D-78567 Fridingen
Tel. 07463/9949-0
Fax 07463/9949-20
info@hs-heizelemente.de
www.hs-heizelemente.de

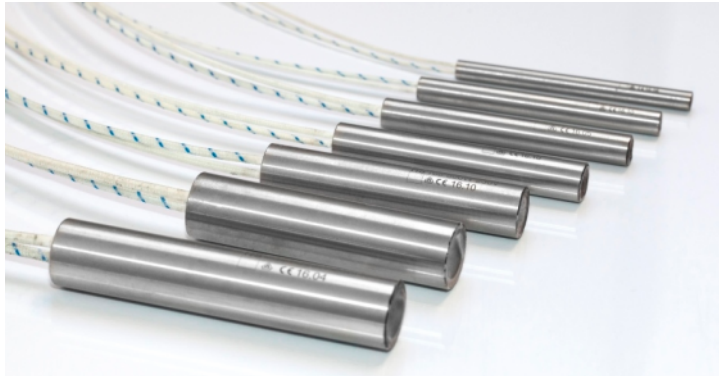

Länge der Anschlussleitungen standardmäßig 300 mm. Andere Längen auf Anfrage.

		Typen- bez.	Länge mm	Leistung in Watt bei 230 V								
Ø 6,5 mm (Durchmesser- toleranz -0,01 bis -0,03 mm)		654	40	100	125	160	175	200				
		655	50	100	125	160	200	250				
		656	60	125	160	200	250	315				
		658	80	125	160	180	200	250	280	315	350	
		6510	100	100	160	200	250	315	350	400		
		6513	130	220	350							
		6516	160	350	400							
Ø 8 mm (Durchmesser- toleranz -0,01 bis -0,03 mm)		84	40	100	160	200	250					
		85	50	125	160	200	250	315				
		86	60	100	125	140	160	200	250	280	315	
		88	80	160	200	250	315	400	500			
		810	100	200	250	280	315	400				
		813	130	250	315	400						
		816	160	200								
Ø 10 mm (Durchmesser- toleranz -0,02 bis -0,04 mm)		104	40	100	125	200	250	315				
		105	50	100	160	200	250	315	400			
		106	60	125	160	200	250	315	400	500		
		108	80	160	200	250	315	400	500	630		
		1010	100	160	200	250	315	400	500	560	630	800
		1013	130	315	400	500	630	800				
		1016	160	400	630							
		1020	200	400	630							
		1025	250	630	800	1000						
Ø 12,5 mm (Durchmesser- toleranz -0,02 bis -0,04 mm)		1254	40	100	160	200	250	315	400			
		1255	50	100	125	160	200	250	315	400	500	
		1256	60	125	160	200	250	315	400	500		
		1258	80	200	250	315	400	500	630	800		
		12510	100	250	315	400	500	630	800	1000		
		12513	130	400	500	630	800	1000				
		12516	160	500	630	800	1000	1250				
		12518	180	800	1000							
		12520	200	630	800							
		12525	250	800	900	1500						
		12530	300	600	1500	2000						

Hochleistungs- Heizpatronen Typenliste Typ HS/VDE



HEINZ STEGMEIER
GmbH
Annastraße 27
D-78567 Fridingen
Tel. 07463/9949-0
Fax 07463/9949-20
info@hs-heizelemente.de
www.hs-heizelemente.de



	Typen- bez.	Länge mm	Leistung in Watt bei 230 V							
			100	160	200	250	315	400	500	630
Ø 16 mm (Durchmesser- toleranz -0,02 bis -0,04 mm)	164	40	100	160	200	250	315	400	500	
	165	50	160	200	250	315	400	500	630	
	166	60	160	200	250	315	400	500	630	
	168	80	250	315	400	500	630	800	1000	
	1610	100	315	400	500	630	800	1000	1250	
	1613	130	500	630	800	1000	1400			
	1616	160	630	800	1000	1250	1600			
	1618	180	1000	1250	1800					
	1620	200	800	1000	1250	1600	2000			
	1625	250	1000	1250	1600	2000				
	1630	300	1250	1800						
Ø 20 mm (Durchmesser- toleranz -0,03 bis -0,05 mm)	205	50	200	250	315	400				
	206	60	200	315	500	630	800			
	208	80	400	500	630	800	1000	1250		
	2010	100	400	630	800	1000	1250	1600		
	2013	130	630	800	1000	1250	1600	2000		
	2016	160	1000	1250	1600	2000	2500			
	2020	200	1250	1600	2000	2500	3150			
	2025	250	1600	2000	2500	3150				
	2030	300	2000	2500	3150	4000				

**Alle oben aufgelistete Typen sind ab Lager lieferbar.
Andere Ausführungen auf Anfrage.**